

Relay Tester AMT



History of Vebko

Vebko (a knowledge-based company) was founded in 2014. Its first industrial product entered the market in mid-2015, and to date more than 850 relay testers have been delivered to major organizations in the power, oil, and gas industries as well as universities. AMT is a general solution for testing a wide range of devices—protective relays, power transformers, current transformers (CT), voltage and capacitive-voltage transformers (VT/CVT), circuit breakers, cables, and temperature sensors—and, with the features below, provides the capacity needed to test diverse relays and protective equipment.

AMT205 offers six 32-A current sources (64 A three-phase, 128 A single-phase; up to 70 A three-phase and 200 A single-phase for less than 300 ms), six 300-V voltage sources (up to 1200 V single-phase), integrated current and voltage outputs, 8 binary/analog inputs, 2 high-accuracy analog current/voltage inputs, 4 binary outputs, and a DC voltage source (up to 420 V).

AMT105 provides six 32-A current sources (64 A three-phase, 128 A single-phase), four 150-V voltage sources (up to 450 V single-phase), integrated current and voltage outputs, 8 binary/analog inputs, 2 high-accuracy analog current/voltage inputs, 4 binary outputs, and a DC voltage source (up to 212 V).

Introduction

Leveraging advanced technology in its R&D process has enabled **VEBKO** to set high standards for **advanced secondary testing equipment** in terms of flexibility, accuracy, portability, and reliability.

Users can select the most suitable device from the **AMT test family** based on their needs in this field.

Several options are available for working with AMT devices:

- **AMT105**—with precise measurement and signal injection—meets the needs of relay and protection specialists for common relay and related equipment tests.
- **AMT205**, using the latest engineering methods, provides precise, high-power signal measurement and generation over a wide range of values, along with **IEC 61850 protocol testing**, delivering a complete package of capabilities for professionals in this domain.
- **AMT103** and **AMT203**, by omitting certain hardware features of AMT105/AMT205, retain several core modules of the base units to cover routine relay tests.

The powerful **AMPRO** PC software—featuring optimized **test rooms** for different applications and a **protection test library (XRIO)**—offers a vast set of capabilities. Flexible composition of these modules in test plans enables **time-saving automation**. With **Transient Simulation**, users can readily perform deeper tests thanks to a **system-based approach** with internal network simulation. **AMT Quick** provides a convenient option for **manual testing**, ideal for quick and simple checks.

Control of **AMT** test equipment is possible via **wired Ethernet, USB, or Wi-Fi**.

AMT105

AMT105 is an excellent choice for test engineers to evaluate protective devices with sufficient precision. It features **six current outputs up to 32 A** and **three voltage outputs at 150 V**, and—with a low weight of just **13 kg**—it is well-suited for testing various equipment in power substations.

AMT205

AMT205 extends capabilities in several directions: generating very small-amplitude signals, measuring signals from **micro-level values up to several hundred units**, producing large-amplitude signals, and expanding data-centric testing of equipment—overcoming the limitations of the AMT105 in these areas.

This unit includes **six 32-A current sources** and **six 300-V voltage sources**. In addition to these features, **current and voltage sources can be reconfigured with respect to each other**, enabling generation of **very small current and voltage signals at very high power**.

AMT103 – AMT203

These devices, while retaining certain signal-generation and measurement modules from their parent units, cover a subset of routine tests—thus providing a **cost-effective** option for engineers who do not require the full feature set.

- **AMT103: 4×150 – 3×32**, 4 Binary/Analog Input, 4 Binary Output, 2 AC/DC Input
- **AMT203: 3×300 – 3×32**, 4 Binary/Analog Input, 4 Binary Output, 2 AC/DC Input

Relay Tester AMT



Device and software equipment classification

Given the features and capabilities of each device, and the suite of test rooms available in the **AMPRO** software, these capabilities have different potentials on the **AMT105** and **AMT205**. In **AMPRO**, they are categorized as **Simple**, **Advanced**, and **Full Access** so that users of each device can work with the functions according to their application needs and the level they have purchased.

Category	Test Options	AMT105										AMT205									
		Simple	Digital Tester	Traditional Tester	Digital Tester & Traditional Tester	Instrument Tester	Traditional Tester and Instrument Tester	Instrument Tester and Traditional & Digital Tester	PMU Tester	Full Version	Custom	Simple	Digital Tester	Traditional Tester	Digital Tester & Traditional Tester	Instrument Tester	Traditional Tester and Instrument Tester	Instrument Tester and Traditional & Digital	PMU Tester	Full Version	Custom
General Test	Sequencer	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Quick	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Transient	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Harmonic Order	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	VCC	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Traditional Relay Test	Distance	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡
	Differential	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡
	Differential (Harmonics)	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡
	VIStarting	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡
	Overcurrent	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡
	Transducer	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡
	Synchronizer	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡
	Rogowski Test	✗	✗	✗	✗	✗	✓	✓	✗	✗	⚡	✗	✗	✗	✓	✗	✓	✓	✗	✓	⚡
	Overcurrent Quick Test	✗	✗	✗	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✗	✓	✗	✓	✓	✗	✓	⚡
	U/O Voltage Test	✗	✗	✗	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✗	✓	✗	✓	✓	✗	✓	⚡
Digital Relay Test (IEC61850)	Sample Value	✗	✓	✓	✓	✗	✗	✓	✗	✗	⚡	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡
	Goose message	✗	✓	✓	✓	✗	✗	✓	✗	✗	⚡	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡
Manufacturer Relay Test	Function Test	✗	✗	✗	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✗	✓	✗	✓	✓	✗	✓	⚡
	Execute Relay Test	✗	✗	✗	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✓	✓	✗	✓	✓	✗	✓	⚡
Instrument Test	Current Transformer	✗	✗	✗	✗	✓	✓	✓	✗	✓	⚡	✗	✗	✗	✗	✓	✗	✓	✗	✓	⚡
	Circuit Breaker	✗	✗	✗	✗	✓	✓	✓	✗	✓	⚡	✗	✗	✗	✗	✓	✗	✓	✗	✓	⚡
	Capacitor Voltage Transformer	✗	✗	✗	✗	✓	✓	✓	✗	✓	⚡	✗	✗	✗	✗	✓	✗	✓	✗	✓	⚡
	Transformer	✗	✗	✗	✗	✓	✓	✓	✗	✓	⚡	✗	✗	✗	✗	✓	✗	✓	✗	✓	⚡
	Resistance	✗	✗	✗	✗	✓	✓	✓	✗	✓	⚡	✗	✗	✗	✗	✓	✗	✓	✗	✓	⚡
	RTD	✗	✗	✗	✗	✓	✓	✓	✗	✓	⚡	✗	✗	✗	✗	✓	✗	✓	✗	✓	⚡
	AR	✗	✗	✗	✗	✓	✓	✓	✗	✓	⚡	✗	✗	✗	✗	✓	✗	✓	✗	✓	⚡
	RGround	✗	✗	✗	✗	✓	✓	✓	✗	✓	⚡	✗	✗	✗	✗	✓	✗	✓	✗	✓	⚡
PMU	Phasor Measurement Unit(PMU)	✗	✗	✓	✓	✗	✗	✗	✓	✓	⚡	✗	✗	✓	✓	✗	✗	✗	✓	✓	⚡
Electronic Relay Test	Test Template	✗	✗	✗	✓	✗	✓	✓	✗	✓	⚡	✗	✗	✗	✓	✗	✓	✓	✗	✓	⚡

Relay Tester AMT



Category	Test Options	AMT103										AMT203									
		Simple	Digital Tester	Traditional Tester	Digital Tester & Traditional Tester	Instrument Tester	Traditional Tester and Instrument Tester	Instrument Tester and Traditional & Digital Tester	PMU Tester	Full Version	Custom	Simple	Digital Tester	Traditional Tester	Digital Tester & Traditional Tester	Instrument Tester	Traditional Tester and Instrument Tester	Instrument Tester and Traditional & Digital	PMU Tester	Full Version	Custom
General Test	Sequencer	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Quick	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Transient	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
	Harmonic Order	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	VCC	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Traditional Relay Test	Distance	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓
	Differential	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓
	Differential (Harmonics)	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓
	VIStarting	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓
	Overcurrent	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓
	Transducer	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
	Synchronizer	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓
	Rogowski Test	✗	✗	✗	✗	✗	✓	✓	✗	✗	✓	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓
	Overcurrent Quick Test	✗	✗	✗	✗	✗	✓	✓	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
	U/O Voltage Test	✗	✗	✗	✓	✗	✓	✓	✗	✓	✓	✗	✗	✗	✓	✓	✓	✓	✗	✓	✓
Digital Relay Test (IEC61850)	Sample Value	✗	✓	✓	✓	✗	✗	✓	✗	✗	✓	✗	✓	✗	✗	✗	✓	✓	✗	✓	✓
	Goose message	✗	✓	✓	✓	✗	✗	✓	✗	✓	✓	✗	✓	✗	✗	✗	✓	✓	✗	✓	✓
Manufacturer Relay Test	Function Test	✗	✗	✗	✓	✗	✓	✓	✗	✓	✓	✗	✗	✗	✓	✗	✓	✓	✗	✓	✓
	Execute Relay Test	✗	✗	✗	✓	✗	✓	✓	✗	✓	✓	✗	✗	✓	✓	✗	✓	✓	✗	✓	✓
Instrument Test	Current Transformer	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
	Circuit Breaker	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
	Capacitor Voltage Transformer	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
	Transformer	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
	Resistance	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
	RTD	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
	AR	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
	RGround	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
PMU	Phasor Measurement Unit(PMU)	✗	✗	✓	✓	✗	✗	✗	✓	✓	✓	✗	✗	✓	✓	✗	✗	✗	✓	✓	✓
Electronic Relay Test	Test Template	✗	✗	✗	✓	✗	✓	✓	✗	✓	✓	✗	✗	✗	✓	✗	✓	✓	✗	✓	✓

AMPRO



The powerful **AMPRO** software for Windows unleashes the full testing potential of the AMT tester. It offers a broad set of **optimized test rooms** for specific applications, enabling users to achieve a **high degree of automation** in their testing workflows.


• Functional testing of measurement and specialized protections

AMPRO provides various options for automated testing through dedicated rooms for specific protection functions—such as **overcurrent relays**, **distance (impedance) relays**, or **differential relays**.

In these rooms, **graphical visualization of relay characteristics**—like **current-time (I/t) curves**, **impedance planes**, etc.—allows you to:

- Define test conditions **graphically**
- Display test results **directly on the relay's characteristic curve**

Relay Tester AMT




This approach increases **accuracy, speed, and the depth of analysis**, and customizes tests to the precise characteristics of each relay.

• Testing of general functions

For creating and executing specialized tests that are not covered by the function-specific test rooms, **AMPRO** also includes the **AMT Sequencer** general test room.

Such tests can include:

- **Multi-state sequences** controlled by time or by the behavior of the relay under test, with evaluation based on **operate-time measurements**
- **Linear or pulsed ramping** of values, with evaluation based on the **pickup** or **reset** point of the relay
- **Manual testing**—by numerically setting and applying **voltage, current, phase angle, frequency**, and more




• VEBKO Control Center (VCC)

To test a range of functions in digital relays, **VEBKO Control Center (VCC)** makes it possible to **combine separate test rooms into a single comprehensive test plan**.

During execution:

- **Each test room** in the plan runs **sequentially**.
- At the end, a complete report of the results of all tested functions is generated automatically.



• Instrument Test


One of the key advantages of the AMT device is its capability to perform a variety of tests on protective apparatus, including:

- Current Transformer
- Capacitor Voltage Transformer
- Circuit Breaker
- Transformer

alongside impedance and ground-resistance testing.

In these tests, the device measures the actual values of injected signals and the precise values of the signals returned from the device under test, ensuring highly accurate results.

To carry out these tests, the software provides a default wiring/connection scheme that can be modified according to set values and test conditions, giving users full flexibility to configure the equipment's test conditions.




• Special Test

In the **Special Test** section, rooms are designed for a set of specific, limited tests that spare users from repeatedly creating time-consuming designs for narrow tasks. These rooms include:

- Test Template
- Over Current Quick Test
- Under Over Voltage
- Function Test

Each of these advances the **test automation** process in its own way.

AMT Sequencer



AMT Sequencer is a highly flexible test room for evaluating the performance of relays and other electrical equipment. A **state** is defined with specific signals (**voltages and currents, binary outputs**) and with **conditions** for transitioning to the next state. Multiple distinct states can be arranged sequentially to form a complete **test sequence**. Transition from one state to the next may occur **after a fixed time, manually, or upon a trigger condition** occurring on the **binary inputs**.

Relay Tester AMT




Definition of individual states

In a given **state**, all configured test signals of the test set (voltage and current outputs) can be adjusted **independently** in **amplitude, phase, and frequency**.

Beyond entering voltages and currents directly, the software can compute other derived parameters, such as **symmetrical components, impedance values, and bias/differential currents**.

In addition to direct voltage and current inputs, the software can also accept inputs in terms of **fault quantities, power quantities, symmetrical components, or impedances** (with **constant test current, constant test voltage, or a fixed source-impedance model**).

For **distance relays**, test points can be defined **directly on the impedance plane** that displays the relay's nominal characteristic.



Assessment and Analyzing

In the software, **measurement conditions** are displayed in a table. After the test is executed, this table also includes the **actual measured times, deviations, and the automatic evaluation** of results. The last column indicates whether each item **passed** or **failed**.



All signals (**voltages, currents, and binary inputs**) can be displayed **graphically** to facilitate relay performance analysis. Signals can be **enabled individually**, and **zooming** is available at specific time points. **Data cursors** allow precise navigation through the time-domain signals and viewing of values at selected times.

Quick

Quick, while providing a simple user interface, offers **powerful capabilities** for performing **manual tests**—tests that can be used for a wide range of **protective relays, measurement transducers, and other equipment**.

Continuous Ramp, Step Ramp

Ramp mode is used to determine threshold values such as a relay's **pick-up** and **drop-off**. In Ramp mode, the selected quantities (e.g., current, voltage, impedance, power, etc.) are increased or decreased by a specified increment at defined time intervals. The same **step** is applied continuously and repeatedly until an input **changes state**.




Harmonics

Harmonics generates test signals that include the fundamental voltage or current component along with added harmonics. This feature enables signal generation up to **1 kHz** on the **AMT105**, and up to **2.5 kHz** on current sources and **10 kHz** on voltage sources for the **AMT205**.


For example: the **60th harmonic** in a **50 Hz** system, or the **50th harmonic** in a **60 Hz** system.

Harmonic magnitudes can be entered in two ways:

- As a **percentage** relative to the fundamental component
 - As an **absolute value**
- The generated harmonic signals can be:
- Output directly, or
 - Exported as COMTRADE files.



Relay Tester AMT



Transient

Transient enables the **AMT** device to perform tests using **transient signals**. Transient signal data from sources such as:




- Power-system simulation software
- Fault recorders
- Test equipment

Tracking

Using this module, you can **graphically define a trajectory** for the impedance or the **differential-bias current** seen by the relay, thereby making it straightforward to conduct key dynamic tests such as **power swing** or **saturation detection**. Its advantages include:

- Simple definition of any desired number of points
- Adjustable speed, magnitude, and progression of the parameter under test
- Setting the direction of change for the parameter under test
- Support for both impedance and differential testing

AMT Overcurrent



Overcurrent is used for automated testing of **directional** and **non-directional** overcurrent relays, in which the **trip-time characteristic**, the **directional boundaries** of current stages, and the **pick-up/drop-off ratio** are evaluated automatically. Owing to the flexible definition of directional boundaries, this capability is also an ideal choice for testing the characteristics of **steady-state ground-fault relays**.

This room supports defining **directional sectors** and any number of elements, including **line-to-line**, **phase-to-ground**, **positive-sequence**, **negative-sequence**, and **zero-sequence**. For each element, the **trip characteristic** can be selected individually and displayed on both the **current-time (I/t) curve** and the **directional plane**.

In the **Overcurrent** module, a set of **test shots** can be defined simultaneously for all desired **fault loops**.

This capability applies to the following fault types:

- Line-to-Line Fault
- Line-to-Ground Fault
- Negative Sequence
- Zero Sequence

The software **overlays** the characteristics of each relevant element on both the **I/t curve** and the **directional plot**, including all elements that respond to the applied fault type. For each test shot, relay performance is evaluated based on allowable **current-measurement** and **operate-time tolerances**.

•Key Features

- Definition of test-point sequences (by fault type, current-magnitude changes, and current-angle changes)
- Performance evaluation for each test shot, considering all active elements
- Unlimited definition of characteristic elements (characteristic type and directional sector)
- Pick-up/Drop-off characteristic testing with automatic evaluation
- Unified testing of all fault types and loops within a single test module
- Concurrent availability of all element and characteristic types
- Option to test with or without load current

•Automatic reporting

Time characteristics can be entered directly as a current/time table, or selected from a wide range of predefined characteristics for relays and reclosers. Structured, hierarchical templates for relay characteristics include:


- Inverse-time characteristics per IEC 60255-4 (BS 142)
- IAC-type characteristics
- Relay-specific curves based on the IEEE equation (standard PC37.112)

Variants of these characteristics support common relay types. **Additional variants** can also be added to the **template file**, including curves **digitized** using the **Overcurrent Characteristics Grabber** tool (explained later).

•Overcurrent Characteristics Grabber


The Overcurrent Characteristics Grabber tool is a companion to the Overcurrent test module. It helps extract inverse-time overcurrent relay trip characteristics from graphical representations. This is especially useful when the relay's characteristic is not provided as a formula and is available only as a plot (e.g., an image in the relay's user manual).

AMT Distance




Distance module enables defining and executing **distance-relay** tests by evaluating **impedance elements**. The process is performed using **single-shot** definitions on the **impedance plane (Z-plane)** with **graphical visualization** of characteristics. It also provides:

- Search and Check tests** for determining **zone reaches**
- Alignment of test parameters** to **zone reaches** and **line angle** using **relative shots**
- Constant Source Impedance test model



•Shot test, Search test, and Check test

- Shot test:** Test points are added individually to the points table and processed automatically.
- Search test:** Zone reach limits are determined automatically. This is done by scanning along search lines defined on the impedance plane, using an optimized algorithm. You can define a set of search lines; all defined lines are saved in a table and processed automatically.
- Check test:** Test points are automatically placed on the **zone tolerance boundaries**. This setup uses **check lines** similar to search lines; however, in this case the test points are positioned only at the intersections of the check lines with the zone tolerance boundaries. **Check** is an efficient method for overall relay testing with **minimal test time**, enabling quick compliance verification—especially useful for routine tests.




•Relative test definitions

One of the system's powerful capabilities is defining **test points relative to the nominal characteristic of the distance relay** (e.g., **90% of Zone 1**, **110% of Zone 1**, **90% of Zone 2**, etc.). In this approach, test points are **not** entered as absolute **R**, **X**, **Z**, or **angle** values; instead, they are defined by their **relative position** with respect to the **zone reaches** and the **line angle**.

This capability enables creation of **reusable test templates** that **automatically align** with the relay's actual settings, eliminating the need to redefine test points for each new relay.

•Constant source impedance model

In addition to the **constant test current** and **constant test voltage** models, the **Distance** module also provides a **constant source impedance** test model. This is particularly useful in cases where parameters such as the **Source Impedance Ratio (SIR)** are important.

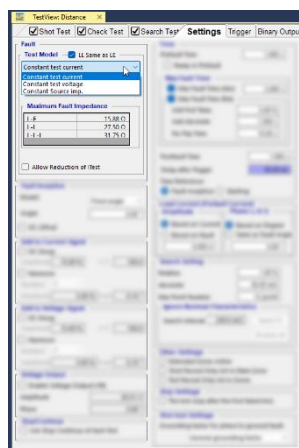


•Testing multiple fault loops in a single test module

The **Distance** module provides dedicated support to run tests for multiple **fault loops**—such as **line-to-ground (L-N)**, **line-to-line (L-L)**, and **three-phase (L-L-L)**—within a single test room.

Separate tabs are provided for all test modes (**Shot**, **Search**, **Check**), each with its own **test-points table** for the corresponding fault type. Test settings can be entered **specifically for each fault loop** or defined **simultaneously for multiple fault types**.


Relay Tester AMT



•Z/t Diagram

This chart displays the graded trip time curve as a function of impedance along a specified line. The line can be defined either on the impedance plane or selected from the test tables. You can also define test points and view the evaluation results directly on this chart.

AMT VI Starting




VI Starting room tests the **Voltage-Dependent Overcurrent Starting Characteristic**, which is used in many distance relays. It is also an ideal tool for performing various tests on **overcurrent** and **undervoltage** functions. For each specified test point, this module automatically determines the **pick-up**, **drop-off**, and their **ratio**.

Benefits

- Ability to define **separate characteristics** for **phase-to-ground** and **phase-to-phase** faults
- **Intuitive UI** with graphical test visualization
- **Clear presentation** of results in **tables and plots**
- **Automatic identification** of characteristics
- **Automated test execution** based on define characteristics
- **Automatic determination** of **pick-up** and **drop-off** values

AMT Differential




A set of test tabs that provides a comprehensive solution for testing differential protection schemes. These tabs are especially well-suited for transformer differential protection with up to three windings and up to six injected currents.

Advanced modeling of the protected equipment (e.g., power transformer), secondary equipment (e.g., CTs and their connections), and the relay's protection characteristics supplies the data required for the test calculations.

Automatic calculation of test currents eliminates complex, time-consuming, and error-prone manual work, making relay testing simpler, faster, and more cost-effective. Main capabilities of this test solution:

- **Support for all fault types:** line-to-ground (L-N), line-to-line (L-L), three-phase (L-L-L)
- **Ability to run Shot** tests at predefined points and **Search** tests to determine zone reach
- **Automatic evaluation and analysis** of results against nameplate specs and defined tolerances
- **Automatic reporting** with **graphical presentation** of results on the characteristic curve
- **No need to block voltage-dependent functions**
- **Synchronization of all shots** with time references such as **PTP, GPS, or IRIG-B**



Key capabilities for testing multifunction relays


- Magnitude and phase correction for higher accuracy
- Transformer nameplate data and vector group
- Fault/feed side (primary, secondary, ...)
- Fault type
- Load current
- CT ratios and connection scheme

Evaluation of protective-relay performance based on:


- Relay operating characteristic (Operating Characteristic)
- Bias calculation (Bias Calculation)
- Zero-sequence elimination (Zero Sequence Elimination)

•Other features

- Support for controlling up to 6 injected currents for convenient testing of **three-winding transformer differential protection**
- Support for non-transformer applications, such as **generator differential-protection testing (no transformer model required)**



AMT Synchronizer



Synchronizer module simulates two systems for the synchronization process:

- System 1 (representing the **mains**) is defined with **fixed amplitude and frequency**.
- System 2 (representing the **generator** or the system being synchronized) has **variable amplitude and frequency** and is controlled.


Performance and evaluation of synchronization

- The software automatically detects the **CB closing command** from the **synchronizer device** or **Synchro-Check relay**, and—taking the **CB closing time** into account—checks whether synchronization occurred **within the permissible synchronizing window**.

Control of the second system (generator)

- The amplitude and frequency of the second system can vary **linearly according to the generator's time constant**.
- The second output can be controlled in **steps (ramping)**.
- For auto-tuning synchronizers, the following control commands can be used to control the second system's voltage output:


- Increase/Decrease voltage ($V\uparrow$, $V\downarrow$)
- Increase/Decrease frequency ($f\uparrow$, $f\downarrow$)



Dynamic simulation and monitoring

- Dynamic generator models are available for more realistic conditions.
- Binary command sequences (for voltage and frequency adjustment) and changes in **voltage** and **frequency** are **monitored graphically**, making the synchronization process clearly visible.
- The **synchronoscope** implemented in **Vector View** displays the **rotating voltage vector** of the second system and indicates the **exact instant of synchronization**.

AMT Transducer & Meter




Transducers & Meters enable connection to the device for **manual or automated** testing of various measurement functions, including:

- Active power (single-phase or three-phase)
- Reactive power (single-phase or three-phase)
- Apparent power (single-phase or three-phase)
- DC quantities (current, voltage, power)
- Power factor ($\cos \phi$)
- Signed average of currents
- DC quantities (current, voltage, power)
- Voltage (phase-to-ground, phase-to-phase)
- Frequency
- Current
- Phase angle
- Var-hours
- Watt-hours
- Ampere-hours
- Volt-hours


The module can test the following characteristics:

- Quadratic
- Linear
- Symmetrical or asymmetrical
- Composite



Manual Test mode is used when a measurement transducer needs re-adjustment (re-calibration). In this mode, any desired input quantity can be generated for the transducer. You can also move easily between key points on a characteristic curve and observe the transducer's error at a given input value. In **Automatic Test**, the predefined **test-points table** is executed sequentially, with documentation and evaluation of results. Here, the test points represent the **measurement transducer's input values**. In addition, the transducer's behavior against changes in **input voltage** or **frequency** can optionally be examined.

Relay Tester AMT




For **multifunction meters** or meters with **two directions of rotation**, a separate table (with multiple tabs) is provided for each test function. Test rows can be **repeated**; in that case, the **standard deviation** is shown alongside the meter error, which can indicate whether the testing process itself is sound. Test quantities are displayed graphically as **phasor diagrams** for **voltage, current, and power**. Testing can be performed with any **symmetrical or asymmetrical load**, for **single-phase meters** (or one element of a three-phase meter), and for **three-wire or four-wire** meters.

To examine meter behavior in the presence of **harmonics** or **DC components**, the following current waveforms can be used:

- Sine wave with harmonics (Sine + Harmonics)
- Pure sine wave (Sine)
- Sine wave with DC component (Sine + DC)

Phasor Measurement unit




The core operation of a **PMU** (Phasor Measurement Unit) is based on precise real-time measurement of voltage and current and the computation of phasor parameters. These devices use **GPS synchronization** to ensure timing accuracy. Accordingly, the test set includes components for simulating real grid conditions, generating standard signals, and verifying synchronization accuracy.

AMPRO will cover the following:

- 1. Grid-condition simulation:** Generates voltage and current signals under various operating conditions—such as load changes, faults, and frequency fluctuations. These signals are applied to the PMU inputs.
- 2. Output evaluation and comparison:** PMU outputs are compared against reference values obtained from the simulations. Any deviation from the reference values may indicate a deficiency or inaccuracy in PMU performance.
- 3. Stability testing:** Designed to assess PMU performance under abnormal conditions and sudden network changes, ensuring correct operation in all scenarios.
- 4. Timing-synchronization accuracy check:** Verifies the PMU's synchronization accuracy with GPS signals and its impact on the device's measurement accuracy.
- 5. Automated testing:** The system should support automated execution of tests to improve efficiency and speed, enabling continuous monitoring of PMU performance.


VEBKO CONTROL CENTER(VCC)



AMPRO software rooms offer comprehensive, advanced capabilities for routine testing of protective equipment. With **VEBKO Control Center (VCC)**, these rooms can be uniquely combined into a single file to form **test plans**.

•Benefits of this technology

- Fast, standardized distribution and sharing across teams or sites
- Simple maintenance and updates of tests
- Easy creation of combined test plans



This capability makes **AMPRO** a highly flexible and powerful tool, enabling **complete management of complex, multi-stage tests** within a single, unified framework.

In essence, a **VCC (VEBKO Control Center) document** contains:


•Test object data

In **AMPRO**, the **Test Object** is defined using the **XRIO** format—a powerful environment for describing and modeling the parameters and settings of the device under test.

•Device/I/O/wiring information

Specified in the hardware configuration and available throughout the test plan to all embedded test modules.

Relay Tester AMT



•Test rooms with test settings (test points, etc.)

The number and type of embedded rooms depend on the intended tests. Tests automatically adapt to modified **test-object** settings, since these are propagated from the overall definition. Using **LinkToXRIO**, the user can access all relay parameters—including user-defined additions—to define test points and evaluation conditions.

•Charts, help texts, etc. (optional)

Test guidance during execution per the specification (e.g., **wiring images**, **inspection instructions**), supported by the **Pause Module** and **Text View**.

•Test Object definition with XRIO


All data related to a relay's settings are stored in **XRIO**. Relevant data can be entered manually or **imported**. Test-object parameters can also be **exported** for use in other test plans.

•LinkToXRIO


LinkToXRIO lets test rooms use **test-object parameters directly**. If a parameter changes, there is **no need** to modify the test plan; the plan will execute the specified tests with the **updated parameter**.

•XRIO converters

XRIO converters efficiently transform existing data from relays' internal parameter structures. The growing library of relay-specific XRIO converters provides **data models** of protection features and tolerances (e.g., **impedance zones**, **I/t curve shapes**, etc.) based on the protection parameters and technical details documented in the device manual.



AMT Current Transformer




This room comprises a set of dedicated tests for **current transformers (CTs)**, the most important of which are:

- Secondary Burden
- Saturation
- Winding Resistance
- CT Ratio and Burden

In these tests, by precisely measuring the actual signal values and performing the procedures specific to each test, results are calculated with high accuracy and recorded in the results table. The system is designed so that, by implementing a variety of test methods, it can evaluate a wide range of CT **classes and specifications**. This approach ensures comprehensive coverage of technical and performance requirements in the **testing and validation** of CTs.

AMT Circuit Breaker



This room provides a comprehensive set of key tests for evaluating **circuit breakers**, including:

- Dynamic Resistance Measurement (DRM)
- Timing Test
- Contact Resistance
- Motor Current
- Minimum PickUp

Within each tab, a variety of tests can be executed based on the user's needs and the type of circuit breaker under test.


Test results are captured with **high-speed sampling** up to **12.5 microseconds (80 kHz)**, delivering high accuracy for performance analysis.

Users can define acceptable ranges and parameters, and the software **intelligently evaluates and reports** results according to these settings.

Relay Tester AMT



AMT Transformer




This room supports a wide range of **power transformers** with various **vector groups**, **voltage levels**, and **tap-changer** types. After entering the transformer nameplate data, the **applicable tests** are displayed automatically based on the equipment type, and the user can select and run the desired tests.

Key tests available in this room include:

- Vector group check, turns ratio, and no-load current
- Percentage impedance (UK%) measurement
- Dynamic Resistance Measurement (DRM)
- Vector group verification (Vector Group Check)
- Zero-sequence impedance measurement
- DC resistance measurement
- Flux division test
- Tap continuity assessment
- No-load current measurement

After all tests are completed, the **Demagnetize** tab provides transformer **demagnetization**, helping prevent operational issues during commissioning and service.

AMT Capacitor Voltage Transformer




This room comprises a set of specialized tests for **capacitive voltage transformers (CVTs)**, including:

- Secondary Burden
- Winding Resistance
- Saturation
- CT Ratio and Burden
- Percentage Impedance (UK%)

Each test precisely measures the actual signals and applies dedicated procedures, calculating results accurately and recording them in the results tables.

These tests are designed with diverse methods to provide broad coverage of different **CVT classes and specifications**, thereby meeting varied technical requirements in CVT **testing and evaluation**.

AMT Resistance



This room also serves as a precise platform for measuring key electrical parameters—including **resistance**, **impedance**, **inductance**, and **capacitance**. Two dedicated tabs with specialized functionality are provided:

•Resistance tab

Suitable for high-accuracy resistance measurements across various configurations, with the ability to tailor test conditions to the specific equipment or circuit under examination.

•Impedance tab

For measuring **impedance**, **inductance**, and **capacitance**, with support for two common test methods:


- Current injection with voltage measurement
- Voltage application with current measurement

This dual-method design offers high flexibility in executing tests and enables measurement of both **AC** and **DC** parameters across a wide range of equipment and circuits.

Relay Tester AMT




AMT AutoRecloser



The **automatic autorecloser test room**—with comprehensive configuration capabilities for defining **test plans** and **standard templates** for periodic and repeatable tests—is designed as an efficient platform for validating equipment in **power distribution networks**. The system supports **parametric tests**, enabling precise evaluation of autorecloser performance and fully **automating test workflows**.

Moreover, autoreclosers manufactured by **Noja, Tavrida, Entec, Schneider, Nu-Lec, and Eaton Cooper** are **fully compatible** with **Vebko AMT**, allowing seamless integration and execution of advanced, automated tests. This technical alignment increases equipment **reliability**, reduces **operational errors**, and optimizes **maintenance and testing** processes.

AMT RGround



RGround Test Room includes a suite of specialized tests for examining and evaluating the **grounding (earthing) system resistance**, comprising:


- Earth Resistance Measurement
- Earth Loop Resistance Measurement
- Grounding System Continuity Test

Using standard methods and precise instrumentation, the **actual earth resistance values** are measured; each test is then analyzed professionally, and the results are recorded in the corresponding reports.

By implementing multiple **measurement methods**, a broad range of grounding conditions and system types with varying specifications is covered, enabling **accurate evaluation**.

These solutions allow engineers and technicians to **assess the grounding system comprehensively** and to **plan corrective actions** with high precision.

Test Template




In this test room, a comprehensive and advanced infrastructure has been implemented, enabling a wide range of protection tests.

The user can perform precise, structured tests for **current, voltage, directional, and directional earth-fault** relays. Evaluation of **simple contact-type relays** is also supported in this environment.

All tests are executed based on the user's input settings, and the results are recorded and presented with analytical detail in accordance with the defined parameters.

Function Test



In this section, a set of **structured, categorized function tests** has been designed and implemented to enable **automated testing** in accordance with **international requirements**, meeting the needs of test and operations engineers. This capability plays a key role in obtaining recognized **performance certifications**.

Currently, the following **automated tests** are supported in this room:


- Current relay testing (IEC 60255-151)
- Voltage relay testing (IEC 60255-127)
- Directional relay testing (IEC 60255-149)

The test-room infrastructure is designed for **dynamic expansion**, allowing new standards to be added in the future. Continuous updates make this system a **reliable option** for performing **standards-based tests** and for **documenting results**.

Relay Tester AMT




OverCurrent Quick Test



This test room is specifically designed and equipped for **electromechanical relays** with **high burden**. The hardware and software infrastructure has been developed to enable accurate testing of this class of equipment, which is typically used in older systems.

The software is designed so that the test process can be executed in the **simplest possible manner—similar to legacy instruments**. With just a few button presses, the user can start the test, and the results are recorded **automatically and in a structured form**. This feature not only increases testing speed and accuracy, but also makes the equipment convenient for specialists who are familiar with **traditional systems**.

Under-Over Voltage




The **Under/Over Voltage** room is specifically designed for testing and evaluating the performance of **voltage protection relays**. It enables precise simulation of voltage **sag** and **swell** conditions across various ranges and examines the relay's response to these conditions.

The user can accurately execute the required tests by defining the **number of stages, function types, thresholds, time delays, and trip/close conditions**. The system records the relay's response in real time as voltage changes occur, then analyzes the results in a **structured** manner and presents them in **tables and plots**.

This room supports testing relay performance under diverse **load** and **voltage** conditions and serves as an effective tool for assessing relays in accordance with **voltage protection standards** in **transmission** and **distribution** networks.

Special features of the AMT205



AMT 205—as an advanced tool for testing and simulating protection equipment—offers specialists a number of standout capabilities. Key features include:

1.Source Type Switching (current/voltage)

This feature lets the user configure each channel as either a **voltage source** or a **current source**. Such flexibility expands the device's applicability for testing various protection devices, especially when **simulating different fault conditions** in power networks.

2.Per-source Display Type


For each source, you can switch the on-screen display between **voltage value** and **current value**. This improves usability and **monitoring accuracy** of electrical parameters during tests.

3.Per-source Scaling Factor


You can apply scaling factors to adjust output signal levels. This is essential for simulating equipment behavior at different scales or aligning precisely with the characteristics of measurement coils such as the **Rogowski Coil**.

4.Virtual sources and virtual binary/analog I/O

The device supports defining **up to 128 virtual binary inputs and outputs**, and can **publish** and **subscribe** to a large number of **GOOSE frames**. A real or virtual **binary output** can be linked to multiple **attributes** to simulate and test various protection scenarios **in real time**.




Rogowski coils



Rogowski coils are used to measure fast, transient AC currents and are widely employed in modern protection equipment. Proper testing of these coils requires signal sources with high accuracy, suitable stability, and immunity to electromagnetic noise.

The **AMT 205**, leveraging advanced internal circuit design, precise signal filtering, and inter-channel isolation, can generate highly accurate and stable waveforms. In addition, the use of up-to-date technologies in the power-supply and control circuitry provides very high resistance to environmental interference—making it fully suitable for sensitive tests such as simulating high-current fault conditions using a **Rogowski Coil**.

IEC 61850 protocol




The **AMT 205**, with a focus on the current needs of protection-system engineers, provides advanced capabilities for the **IEC 61850** protocol—especially **SV (Sampled Values)** and **GOOSE messaging**.

•GOOSE(Generic Object Oriented Substation Event)

This device supports defining **up to 128 virtual binary inputs and outputs** and enables the **publishing (Publish)** and **subscribing (Subscribe)** of a large number of **GOOSE frames**. A **real or virtual binary output** can also be linked to multiple **attributes** so that various protection scenarios can be simulated and tested **in real time**.

Leveraging the **precision and speed** of the **AMT 205**, instantaneous **sending and receiving of GOOSE frames** under real operating conditions is possible, providing a powerful tool for evaluating and verifying the correct operation of **relays and protection systems**.

•SV(Sampled Value)



AMT 205, with support for **IEC 61850-9-2** and **IEC 61850-9-2LE**, provides advanced capabilities for **Sampled Value (SV)** simulation and testing.

The device can **create and manage up to 10 SV streams** and allows defining **up to 8 ASDUs per packet**. In **Publish** mode, you can **link up to 20 attributes** to real and virtual **analog outputs** and publish them precisely under the cited protocols.

In **Subscribe** mode, the device can **receive, capture, and analyze up to 10 SV streams** via **virtual analog inputs**.

Together, these features make the **AMT 205** a powerful tool for testing **Sampled Value-based equipment**, enabling comprehensive evaluation of operational scenarios in **protection and measurement** systems.

Relay Tester AMT



Introduction




AMT 105 and AMT 205 are two advanced, specialized products from Vebko, designed and manufactured to facilitate and enhance the testing and evaluation of relays and protective equipment in power systems. Leveraging modern hardware and software technologies, these devices enable engineers and protection specialists to perform a wide range of precise, reliable tests in accordance with international standards. Both units are equipped with configurable voltage and current sources, binary inputs/outputs, and analog channels, allowing users to fully simulate real operating conditions of relays and protection systems—so tests are carried out with high accuracy under field-like conditions.

Compared with the **AMT 105**, the **AMT 205** is technically more advanced and, thanks to its **higher output power, faster sampling rates, wider measurement range, and greater signal-control accuracy**, is an ideal choice for **heavier projects and more complex tests**. A standout advantage of the AMT 205 is its support for modern international protocols and standards such as **IEC 61850**, which allows users to perform advanced tests based on **digital communication networks** with ease.


Complementing this powerful hardware, Vebko provides its dedicated **AMPRO** software, which handles **control, monitoring, and automation** of the testing process. With a user interface that is both simple and professional, **AMPRO** supervises every stage of the test in real time and manages the device outputs according to the defined scenarios.

Electrical and Physical Specifications

AMT105

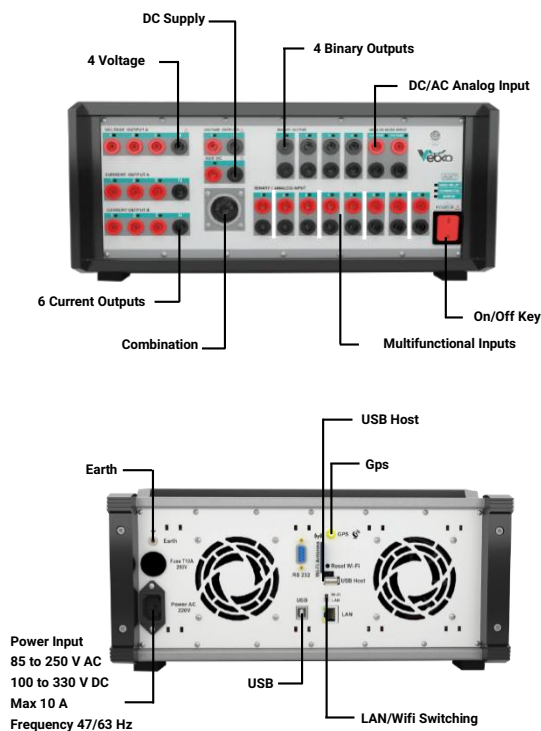

AMT205

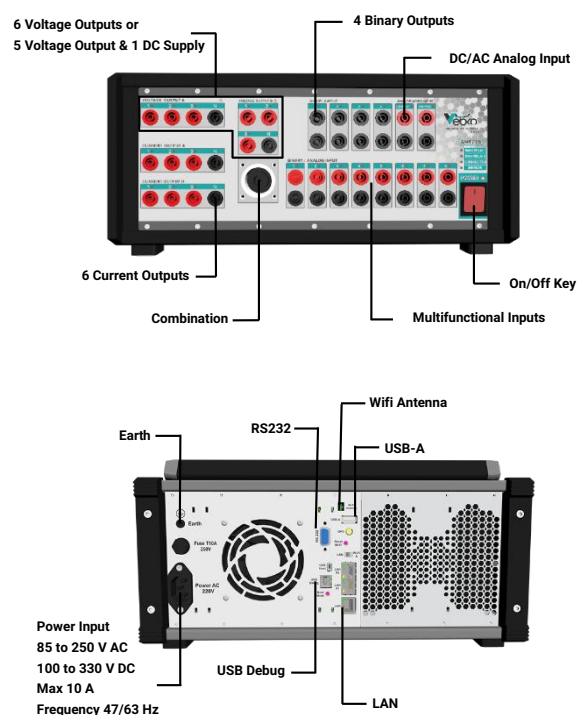

Relay Tester AMT





Power Supply AMT105			
Power supply range		ΔΔ-240 VAC or 100-330VDC	
Input frequency range		FV-63 Hz	
Consumption		up to 2 KVA	
Nominal current		1°A at 230 VAC	
Connection		According to IEC60320	
High Voltage, Low Current Generators AMT105 (Input Voltage≥ 220V)			
Voltage	φPhase (L-N)	AC: 4 X 0 ... 150 V	
		DC: 4 X 0 ... 210 V	
	Series and parallel	Yes	
	Resolution	400 μV	
	Accuracy	Guar.: 0.15% of rd. + 0.015% of rg.	
Typ.: 0.05% of rd. + 0.005% of rg.			
Current	No		
Phase	Range	°* to 360°	
	Resolution	1μ°	
	Accuracy	Guar.: 0.1°	
Typ.: 0.01°			
Frequency	Range	°... 10 kHz	
	Resolution	1μHz	
	Accuracy	Guar.: 10 μHz , Typ.: 1 μHz	
Power			
Harmonic Injection		Enter Harmonic	Yes
		Harmonic Order	No
		2 Free Harmonic	
Recording		Sampling Rate	1.2 ms
		Variable	Currents and Voltages
Protection		Detection	Power according to power curves
			No
		Type	Test o
Connection Banana Sockets		Fmm (0.16 in) banana sockets	
Connection Combination Socket		Group A	
LED		Green (1 Color)	
Low Voltage, High Current Generators AMT105			
Current	Normal Mode	6 Phase (L-N)	AC: 6 X 0 ... 32 A
			DC: 6 X 0 ... 32 A
		Resolution	85 μA
	Accuracy	Guar.: 0.15% of rd. + 0.015% of rg.	
		Typ.: 0.05% of rd. + 0.005% of rg.	
	Internal Booster Mode	No	
Maximum Compliance Voltage		12V	
Series and parallel		Yes	
Voltage	No		

Power Supply AMT205					
Power supply range		ΔΔ-240 VAC or 100-330VDC			
Input frequency range		FV-63 Hz			
Consumption		up to 3 KVA			
Nominal current		ΔA at 230 VAC			
Connection		According to IEC60320			
High Voltage, Low Current Generators AMT205 (Input Voltage≥ 220V)					
Voltage	φPhase (L-N)	AC: 6 X 0 ... 300 V DC: 6 X 0 ... 420 V			
	Series and parallel	Yes			
	Resolution	20 μV			
	Accuracy	Guar.: 0.15% of rd. + 0.015% of rg. Typ.: 0.05% of rd. + 0.005% of rg.			
Current	Normal Mode	φPhase (L-N)	AC: 6 X 0 ... 0.25 A DC: 6 X 0 ... 0.4 A		
	Internal Booster Mode time<200ms	φPhase (L-N)	AC: 6 X 0 ... 0.85 A DC: 6 X 0 ... 1.2 A		
	Series and parallel		Yes		
	Resolution		1°μA		
	Accuracy		Guar.: 0.15% of rd. + 0.015% of rg.		
			Typ.: 0.05% of rd. + 0.005% of rg.		
Phase	Range	°* to 360°			
	Resolution	1μ°			
	Accuracy	Guar.: 0.1° Typ.: 0.01°			
Frequency	Range	°... 5 kHz			
	Resolution	1μHz			
	Accuracy	Guar.: 10 μHz , Typ.: 1 μHz			
Power					
Harmonic Injection		Enter Harmonic	Yes	2 Free Harmonic	
		Harmonic Order	No		
Recording		Sampling Rate	1.2 ms		
		Variable	Currents and Voltages		
Protection		Detection	Power according to power curves		
			No		
		Type	Test o		
Connection Banana Sockets		Fmm (0.16 in) banana sockets			
Connection Combination Socket		Group A			
LED		Green (1 Color)			
Low Voltage, High Current Generators AMT205					
Current	Normal Mode	6 Phase (L-N)	AC: 6 X 0 ... 32 A DC: 6 X 0 ... 45 A		
		Resolution	170 μA		
		Accuracy	Guar.: 0.15% of rd. + 0.015% of rg. Typ.: 0.05% of rd. + 0.005% of rg.		
	Mode amplificateur interne temps < 300 ms	6 Phase (L-N)	AC: 6 X 0 ... 67 A DC: 6 X 0 ... 95 A		
		Resolution	170 μA		
		Accuracy	Guar.: 0.15% of rd. + 0.015% of rg. Typ.: 0.05% of rd. + 0.005% of rg.		
	Maximum Compliance Voltage		22V		
	Series and parallel		Yes		
	Voltage	6 Phase (L-N)		AC: 6 X 0 ... 12 V DC: 6 X 0 ... 20 V	
		Series and parallel		Yes	
Resolution		40 μV			
Accuracy		Guar.: 0.15% of rd. + 0.015% of rg.			
		Typ.: 0.05% of rd. + 0.005% of rg.			

Relay Tester AMT

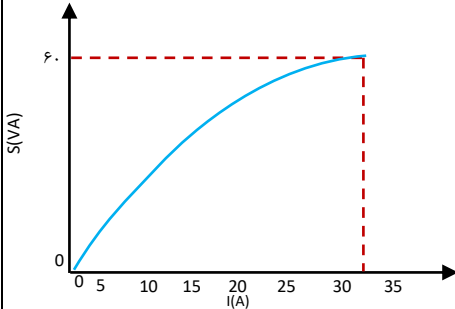

(continue) Low Voltage, High Current Generators AMT105				
Phase	Range		0° to 360°	
	Resolution		1μ°	
	Accuracy		Guar.: 0.1° Typ.: 0.01°	
Frequency	Range		0 ... 2.5 kHz	
	Resolution		1 μHz	
	Accuracy		Guar.: 10 μHz Typ.: 1 μHz	
Recording	Sampling Rate		1.2 ms	
	Variable		Currents	
Protection	Detection	Maximum Neutral Current	32A: Unlimited	
			64 A: 3 s	
			100 A: 300 ms	
	Setting		Soware Controlled: Time , Enable	
Type		Test off		
Maximum Neutral Current	4 mm (0.16 in) banana sockets / 32 A continuously			
Connection Banana Sockets	Group A (30 A continuously max)			
LED	Green (1 Color)			
Harmonic Injection	Enter Harmonic	Yes	2 Free Harmonic	
	Harmonic Order	No		
Power				
Binary/Analog Inputs 105				
Number	8			
Dry	Open Circuit Voltage		ΔV	
	Short Circuit Voltage		Soware controlled	
Wet	Range 1: 0 ... ±4.5 V(Peak)	Accuracy	±0.5% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	3ΔμV	
		Impedance	F93.75 KΩ	
	Range 1: 0 ... ±30 V(Peak)	Accuracy	±0.5% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	250μV	
		Impedance	F14.783 KΩ	
	Range 1: 0 ... ±180 V(Peak)	Accuracy	±0.5% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	1.5mV	
		Impedance	F05.267 KΩ	
	No			
Recording	Sampling Rate		12.5 μs	
Protection	Detection		Over voltage	
	Setting		Soware Controlled: Time , Enable	
	Type		Test o, Change to Dry	
Galvanic Isolation		A Group (1+1+1+1+1+1+1+1)		
LED	Green (1 Color)			

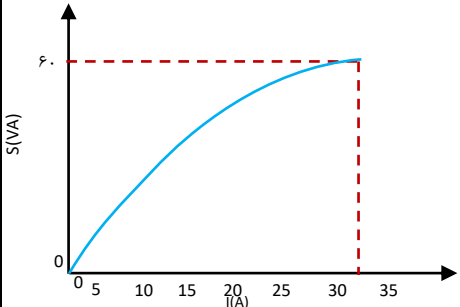(continue) Low Voltage, High Current Generators AMT205				
Phase	Range		0° to 360°	
	Resolution		1μ°	
	Accuracy		Guar.: 0.1° Typ.: 0.01°	
Frequency	Range		0 ... 2.5 kHz	
	Resolution		1 μHz	
	Accuracy		Guar.: 10 μHz Typ.: 1 μHz	
Recording	Sampling Rate		1.2 ms	
	Variable		Currents & Voltages	
Protection	Detection	Maximum Neutral Current	32A: Unlimited	
			64 A: 3 s	
			100 A: 300 ms	
	Setting		Soware Controlled: Time, Enable	
Type		Test off		
Maximum Neutral Current	4 mm (0.16 in) banana sockets / 32 A continuously			
Connection Banana Sockets	Group A (30 A continuously max)			
LED	RGB (16 Million Color)			
Harmonic Injection	Enter Harmonic	Yes	2 Free Harmonic	
	Harmonic Order	Yes	Maximum Order 40 for 50Hz (2KHz)	
Power				
Binary/Analog Inputs 205				
Number	8			
Dry	Open Circuit Voltage		ΔV	
	Short Circuit Voltage		Soware controlled	
Wet	Range 1: 0 ... ±4.5 V(Peak)	Accuracy	±0.5Δ% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	3ΔμV	
		Impedance	493.75 KΩ	
	Range 1: 0 ... ±30 V(Peak)	Accuracy	±0.5Δ% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	250μV	
		Impedance	14.783 KΩ	
	Range 1: 0 ... ±180 V(Peak)	Accuracy	±0.5Δ% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	1.5mV	
		Impedance	5.267 KΩ	
	Range 1: 0 ... ±520 V(Peak)	Accuracy	±0.5Δ% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	4mV	
		Impedance	4.298 KΩ	
Recording	Sampling Rate		12.5 μs	
Protection	Detection		Over voltage	
	Setting		Soware Controlled: Time, Enable	
	Type		Test o, Change to Dry	
Galvanic Isolation		A Group (1+1+1+1+1+1+1+1)		
LED		RGB (16 Million Color)		

Relay Tester AMT



Binary Outputs AMT105			
Type	Electro mechanical relay contacts		
	-		
Control	Soware controlled		
Number	4		
Maximum Voltage in open mode	Electro Mechanic	VΔ•V (Rms)	
	No		
Maximum Current	Electro Mechanic	I•A (Rms)	
	No		
Break Capacity AC	Electro Mechanic	YΔ••VA	
	No		
Break Capacity DC	Electro Mechanic	Y•••W	
	No		
Recording	No		
Protection	No		
Galvanic Isolation	FGroup (1+1+1+1)		
LED	Green (1 Color)		
AC/DC Current Measuring Input AMT105			
Range 2: 0 ... ± 800 mA	Accuracy	•.05% of rg	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	FμA	
	Shunt	IΩ	
Range 3: 0 ... ± 35 mA	No		
Range 1: 0 ... ± 10 A	No		
Range 4: 0 ... ± 250 μA	No		
Recording	Resolution	F••μs	
Protection	Accuracy	Overcurrent	
	Setting	Soware Controlled: Time , Enable	
	Type	Test o, Change to open circuit	
Galvanic Isolation	1 Group		
LED	Green (1 Color)		
AC/DC Voltage Measuring Input AMT105			
Range 1: 0 ... ±400 mV(Peak)	Accuracy	•.05% of rg.	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	YμV	
	Impedance	ΔF.7826 KΩ	
Range 2: 0 ... ±120 mV(Peak)	No		
Range 1: 0 ... ±50 mV(Peak)	No		
Range 2: 0 ... ±10 mV(Peak)	No		
Recording	Sampling Rate	F•• μs	
Protection	Detection	Over Voltage	
	Setting	Software Controlled: Time , Enable	
	Type	Test o	
Galvanic Isolation	1 Group		
LED	Green (1 Color)		
AUX. DC AMT105			
Aux. DC	Any combination of 12 channels	•... 212 V	
		•... 0.4 A	
GPS AMT105			
Internal GPS Module	Yes		
Accuracy	Ans		
Time To Lock	1•s		
Delay Adjustment	Yes		

Binary Outputs AMT205			
Type	Electro mechanical relay contacts		
	Transistor		
Control	Soware controlled		
Number	4		
Maximum Voltage in open mode	Electro Mechanic	VΔ=V (Rms)	
	Transistor	Δ=V	
Maximum Current	Electro Mechanic	I= A (Rms)	
	Transistor	Δ= mA	
Break Capacity AC	Electro Mechanic	Smax	YΔ= VA
	Transistor	Smax	Y.5 VA
Break Capacity DC	Electro Mechanic	Pmax	Y= W
	Transistor	Pmax	Y.5W
Recording	Sampling Rate	Δ= μs	
	Resolution	YmA	
	Accuracy	=.3 mA	
Protection	Detection	Overcurrent	
	Setting	Soware Controlled: Time , Enable	
	Type	Test o, Open Relays	
Galvanic Isolation	YGroup (1+1+1+1)		
LED	RGB (16 Million Color)		
AC/DC Current Measuring Input AMT205			
Range 2: 0 ... ± 800 mA	Accuracy	=.05% of rg	
	Accuracy (Avg)	=.02% of rg.	
	Resolution	YμA	
	Shunt	IΩ	
Range 3: 0 ... ± 35 mA	Accuracy	=.05% of rg	
	Accuracy (Avg)	=.02% of rg.	
	Resolution	=.3 μA	
	Shunt	YΩ	
Range 1: 0 ... ± 10 A	Accuracy	=.05% of rg	
	Accuracy (Avg)	=.02% of rg.	
	Resolution	1.5mA	
	Shunt	ΔmΩ	
Range 4: 0 ... ± 82 μA	Accuracy	=.05% of rg	
	Accuracy (Avg)	=.02% of rg.	
	Resolution	nA	
	Shunt	YKΩ	
Recording	Resolution	1Y.5 μs	
Protection	Accuracy	Overcurrent	
	Setting	Soware Controlled: Time , Enable	
	Type	Test o, Change to open circuit	
Galvanic Isolation	1 Group		
LED	RGB (16 Million Color)		
AC/DC Voltage Measuring Input AMT205			
Range 1: 0 ... ±400 mV(Peak)	Accuracy	=.05% of rg.	
	Accuracy (Avg)	=.02% of rg.	
	Resolution	YμV	
	Impedance	ΔF.7826 KΩ	
Range 2: 0 ... ±120 mV(Peak)	Accuracy	=.05% of rg.	
	Accuracy (Avg)	=.02% of rg.	
	Resolution	1μV	
	Impedance	1Y3Y/VΔ KΩ	
Range 1: 0 ... ±50 mV(Peak)	Accuracy	=.05% of rg.	
	Accuracy (Avg)	=.02% of rg.	
	Resolution	Δ= nV	
	Impedance	ΔF.7826 KΩ	
Range 2: 0 ... ±10 mV(Peak)	Accuracy	=.05% of rg.	
	Accuracy (Avg)	=.02% of rg.	
	Resolution	1=nV	
	Impedance	1Y3Y/VΔ KΩ	
Recording	Sampling Rate	1Y/Δ μs	
Protection	Detection	Over Voltage	
	Setting	Software Controlled: Time , Enable	
	Type	Test o, Change to open circuit	
Galvanic Isolation	1 Group		
LED	RGB (16 Million Color)		
AUX. DC AMT205			
Aux. DC	Any combination of 12 channels	Max Voltage : 1200 V , 0.4 A	
		Max Current : 8 V , 210 A	
GPS AMT205			
Internal GPS Module	Yes		
Accuracy	Ans		
Time To Lock	1=s		
Delay Adjustment	Yes		

Relay Tester AMT



Protocol AMT105		
IEC 61850	GOOSE Publish	10
	Goose Subscribe	10
	Virtual Binary I/O	32 IN / 32 OUT
	SV Publish Streams	NO
	SV Subscribe Streams	NO
	SV Sample Rates	NO
	Ethernet Ports	1x RJ45 100Base
	Time Sync	PPS
	Time Accuracy	±80 ns (PPS)
Combination Cable AMT105		
V ^o Voltage, 3 Current		Yes
F ^o Current		Yes
PC Connection AMT105		
Wifi		Yes
LED		1 Port
Programming USB Port		No
Physical Characteristic AMT105		
Weight		1Fkg
Dimension		Y ^o Δcm-35cm-15cm
Operating Temperature		-10 to 55° C
Storage Temperature		-20 to 85° C
Humidity		Y ^o %
Transformer Specification AMT105		
HV & LV outputs-power	Frequency	
	Power	
HV & LV outputs-Voltage	Y ^o -phase AC (RMS)	±-150 V(LN)....550mA peak
	l-phase AC (RMS)	±-450V(LN)....550 mA peak
	Y ^o -phase DC	±-220V(LN)....550 mA
	l-phase DC	±-630V(LN)....550mA peak
HV & LV outputs-Current	Y ^o -phase AC (RMS)	±-32A....12V
	l-phase AC (RMS)	
	Y ^o -phase DC	±-10A....12V
	l-phase DC	±-10A....40V
HV & LV input-Voltage	AC(RMS)	... 400m V 0.01 % rd + 0.017 % range ... 4.5 V 0.007 % rd + 0.012 % range ... 30V 0.022 % rd + 0.032 % range ... 188V 0.01 % rd + 0.017 % range
	DC	
HV & LV input-Current	AC(RMS)	... 800 mA 0.008 % rd + 0.01 % range
	DC	
Test Standard		
		IEC61869 / 60044
Voltage Output Range		±-450V
Current Output Range		±-128A
Output Frequency Range		DC & 5-2500HZ
CT Ratio Measurement Accuracy		Ratio: 1-30000 accuracy: 0.2
Phase displacement: Resolution Accuracy		0.01 min Y ^o min (typical) / 5 min (guaranteed)
Minimum Knee Point		±.5V
Maximum Knee Point		FΔ±.V
Winding Resistance Resolution Accuracy		1 mΩ ±.05 % (typical) / 0.1 % + 1 mΩ (guaranteed)
Current Input Range(CT Secondary Side)		1mA - 500mA
Minimum Knee Current		1mA
Maximum Knee Voltage		1.5A Up to 4KV

Protocol AMT205		
IEC 61850	GOOSE Publish	128
	Goose Subscribe	128
	Virtual Binary I/O	360 IN / 360 OUT
	SV Publish Streams	10
	SV Subscribe Streams	10
	SV Sample Rates	80-256 samples/cycle
	Ethernet Ports	3x RJ45 100Base, 1x External Fiber 100Base (Optional)
	Time Sync	PTP (IEEE-1588), IRIG-B, PPS, SNTP
	Time Accuracy	±1 μs (PTP), ±80 ns (PPS)
Combination Cable AMT205		
V ^o Voltage, 3 Current		Yes
F ^o Current		No
PC Connection AMT205		
Wifi		Yes
LED		1 Port
Programming USB Port		Yes
Physical Characteristic AMT205		
Weight		1Fkg
Dimension		Y ^o Δcm-35cm-15cm
Operating Temperature		-10 to 55° C
Storage Temperature		-20 to 85° C
Humidity		Y ^o %
Transformer Specification AMT205		
HV & LV outputs-power	Frequency	
	Power	
HV & LV outputs-Voltage	Y ^o -phase AC (RMS)	±-600 V(LN)....1.2 A peak
	l-phase AC (RMS)	±-1200V(LN)....1.2 A peak
	Y ^o -phase DC	±-850V(LN)....1.2 A
	l-phase DC	±-1700V(LN)....1.2 A peak
HV & LV outputs-Current	Y ^o -phase AC (RMS)	±-32A....22V
	l-phase AC (RMS)	
	Y ^o -phase DC	±-10A....22V
	l-phase DC	±-10A....60V
HV & LV input-Voltage	AC(RMS)	0 ... 10 mV 0.022 % rd + 0.032 % range ... 50 mV 0.01 % rd + 0.017 % range ... 120m V 0.007 % rd + 0.012 % range ... 400m V 0.01 % rd + 0.017 % range ... 4.5 V 0.007 % rd + 0.012 % range ... 30V 0.022 % rd + 0.032 % range ... 188V 0.01 % rd + 0.017 % range ... 520 V 0.007 % rd + 0.012 % range
	DC	
HV & LV input-Current	AC(RMS)	0 ...82 uA 0.1 % rd + 0.023 % range ... 35 mA 0.037 % rd + 0.026 % range ... 800 mA 0.008 % rd + 0.01 % range ... 10 A 0.008 % rd + 0.01 % range
	DC	
Test Standard		
		IEC61869 / 60044
Voltage Output Range		±-1200V
Current Output Range		±-128A
Output Frequency Range		DC & 5-2500HZ
CT Ratio Measurement Accuracy		Ratio: 1-30000 accuracy: 0.2
Phase displacement: Resolution Accuracy		0.01 min Y ^o min (typical) / 5 min (guaranteed)
Minimum Knee Point		±.01V
Maximum Knee Point		1±KV
Winding Resistance Resolution Accuracy		1 mΩ ±.05 % (typical) / 0.1 % + 1 mΩ (guaranteed)
Current Input Range(CT Secondary Side)		1mA - 7 A
Minimum Knee Current		1±uA
Maximum Knee Voltage		10A up to 50V Y ^o .5A Up to 10KV

Relay Tester AMT




PT SPECIFICATION AMT105	
Test Standard	IEC61869 / 60044
Voltage Output Range	0-450V AC
Current Output Range	0-128A
Ratio Measurement Voltage Level Typical accuracy	Ratio: 1-500KV accuracy: 0.2
Phase displacement measurement Voltage level Typical accuracy	0.01 min 1°min (typical) / 5 min (guaranteed)
Winding Resistance: Resolution Guaranteed Accuracy Typical accuracy	1 mΩ 0.1 % + 1 mΩ 0.05 %


PT SPECIFICATION AMT205	
Test Standard	IEC61869 / 60044
Voltage Output Range	0-1200 V AC
Current Output Range	0-128A
Ratio Measurement Voltage Level Typical accuracy	Ratio: 1-500KV accuracy: 0.2
Phase displacement measurement Voltage level Typical accuracy	0.01 min 1°min (typical) / 5 min (guaranteed)
Winding Resistance: Resolution Guaranteed Accuracy Typical accuracy	1 mΩ 0.1 % + 1 mΩ 0.05 %

Electrical and Physical Specifications

AMT103

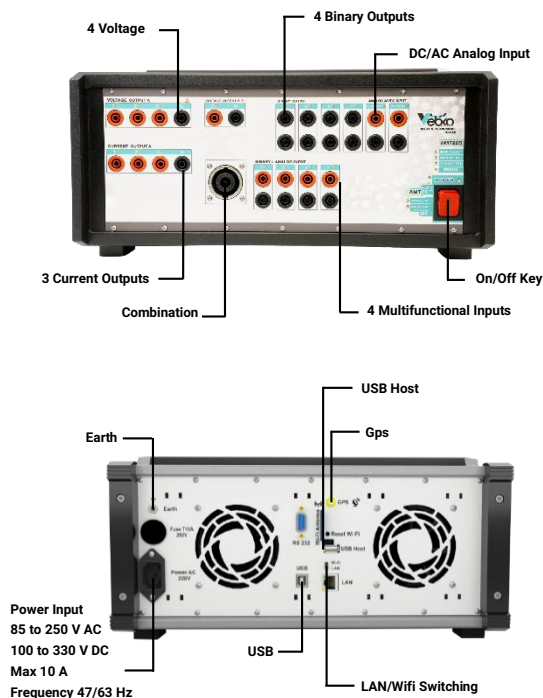

AMT203

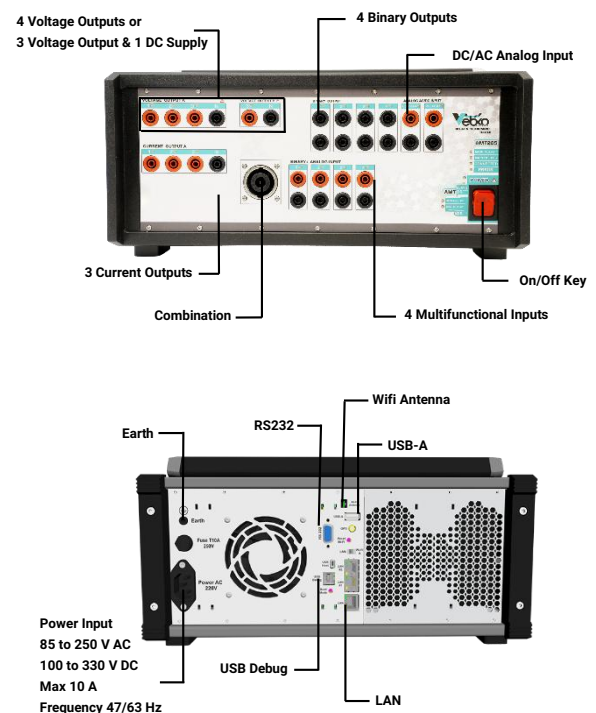

Relay Tester AMT





Power Supply AMT103			
Power supply range		ΔΔ-240 VAC or 100-330VDC	
Input frequency range		FV-63 Hz	
Consumption		up to 2 KVA	
Nominal current		1°A at 230 VAC	
Connection		According to IEC60320	
High Voltage, Low Current Generators AMT103 (Input Voltage≥ 220V)			
Voltage	φPhase (L-N)	AC: 4 X 0 ... 150 V	
		DC: 4 X 0 ... 210 V	
	Series and parallel	Yes	
	Resolution	400 μV	
	Accuracy	Guar.: 0.15% of rd. + 0.015% of rg.	
Typ.: 0.05% of rd. + 0.005% of rg.			
Current	No		
Phase	Range	°* to 360°	
	Resolution	1μ°	
	Accuracy	Guar.: 0.1°	
Typ.: 0.01°			
Frequency	Range	°... 10 kHz	
	Resolution	1μHz	
	Accuracy	Guar.: 10 μHz , Typ.: 1 μHz	
Power			
Harmonic Injection		Enter Harmonic	Yes
		Harmonic Order	No
		2 Free Harmonic	
Recording	Sampling Rate		1.2 ms
	Variable	Currents and Voltages	
Protection	Detection	Power according to power curves	
		No	
	Type	Test o	
Connection Banana Sockets		Fmm (0.16 in) banana sockets	
Connection Combination Socket		Group A	
LED		Green (1 Color)	
Low Voltage, High Current Generators AMT103			
Current	Normal Mode	6 Phase (L-N)	AC: 3 X 0 ... 32 A
			DC: 3 X 0 ... 32 A
		Resolution	85 μA
	Accuracy	Guar.: 0.15% of rd. + 0.015% of rg.	
		Typ.: 0.05% of rd. + 0.005% of rg.	
		Internal Booster Mode	No
Maximum Compliance Voltage		12V	
Series and parallel		Yes	
Voltage	No		

Power Supply AMT203				
Power supply range		ΔΔ-240 VAC or 100-330VDC		
Input frequency range		FV-63 Hz		
Consumption		up to 3 KVA		
Nominal current		ΔA at 230 VAC		
Connection		According to IEC60320		
High Voltage, Low Current Generators AMT203 (Input Voltage≥ 220V)				
Voltage	φPhase (L-N)	AC: 4 X 0 ... 300 V		
		DC: 4 X 0 ... 420 V		
	Series and parallel	Yes		
	Resolution	20 μV		
Accuracy		Guar.: 0.15% of rd. + 0.015% of rg.		
		Typ.: 0.05% of rd. + 0.005% of rg.		
Current	Normal Mode	φPhase (L-N)	AC: 4 X 0 ... 0.25 A	
			DC: 4 X 0 ... 0.4 A	
	Internal Booster Mode time<200ms	φPhase (L-N)	AC: 4 X 0 ... 0.85 A	
			DC: 4 X 0 ... 1.2 A	
	Series and parallel	Yes		
	Resolution	1°μA		
Accuracy		Guar.: 0.15% of rd. + 0.015% of rg.		
		Typ.: 0.05% of rd. + 0.005% of rg.		
Phase	Range	°* to 360°		
	Resolution	1μ°		
	Accuracy	Guar.: 0.1°		
Frequency	Range	°... 5 kHz		
	Resolution	1μHz		
	Accuracy	Guar.: 10 μHz , Typ.: 1 μHz		
Power				
Harmonic Injection		Enter Harmonic	Yes	2 Free Harmonic
		Harmonic Order	No	
Recording	Sampling Rate		1.2 ms	
	Variable		Currents and Voltages	
Protection	Detection		Power according to power curves	
			No	
	Type		Test o	
Connection Banana Sockets		Fmm (0.16 in) banana sockets		
Connection Combination Socket		Group A		
LED		Green (1 Color)		
Low Voltage, High Current Generators AMT203				
Current	Normal Mode	6 Phase (L-N)	AC: 3 X 0 ... 32 A	
			DC: 3 X 0 ... 45 A	
		Resolution	170 μA	
	Accuracy	Guar.: 0.15% of rd. + 0.015% of rg.		
		Typ.: 0.05% of rd. + 0.005% of rg.		
	Mode amplificateur interne temps < 300 ms	6 Phase (L-N)	AC: 3 X 0 ... 67 A	
			DC: 3 X 0 ... 95 A	
Resolution		170 μA		
Accuracy		Guar.: 0.15% of rd. + 0.015% of rg.		
		Typ.: 0.05% of rd. + 0.005% of rg.		
Maximum Compliance Voltage		22V		
Series and parallel		Yes		
Voltage	6 Phase (L-N)		AC: 3 X 0 ... 12 V	
			DC: 3 X 0 ... 20 V	
	Series and parallel		Yes	
	Resolution		40 uV	
Accuracy			Guar.: 0.15% of rd. + 0.015% of rg.	
			Typ.: 0.05% of rd. + 0.005% of rg.	

Relay Tester AMT

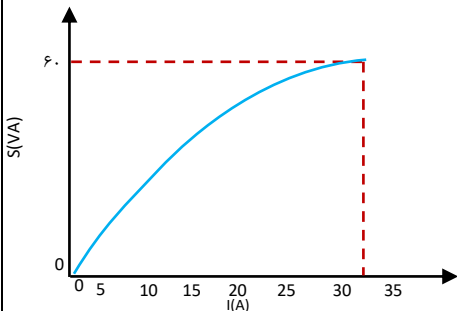

(continue) Low Voltage, High Current Generators AMT103				
Phase	Range		0° to 360°	
	Resolution		1μ°	
	Accuracy		Guar.: 0.1° Typ.: 0.01°	
Frequency	Range		0 ... 2.5 kHz	
	Resolution		1 μHz	
	Accuracy		Guar.: 10 μHz Typ.: 1 μHz	
Recording	Sampling Rate		1.2 ms	
	Variable		Currents	
Protection	Detection	Maximum Neutral Current	32A: Unlimited	
			64 A: 3 s	
			100 A: 300 ms	
	Setting		Soware Controlled: Time , Enable	
Type		Test off		
Maximum Neutral Current	4 mm (0.16 in) banana sockets / 32 A continuously			
Connection Banana Sockets	Group A (30 A continuously max)			
LED	Green (1 Color)			
Harmonic Injection	Enter Harmonic	Yes	2 Free Harmonic	
	Harmonic Order	No		
Power				
Binary/Analog Inputs 103				
Number	4			
Dry	Open Circuit Voltage		ΔV	
	Short Circuit Voltage		Soware controlled	
Wet	Range 1: 0 ... ±4.5 V(Peak)	Accuracy	±0.02% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	1μV	
		Impedance	193.75 KΩ	
	Range 1: 0 ... ±30 V(Peak)	Accuracy	±0.02% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	250μV	
		Impedance	14.783 KΩ	
	Range 1: 0 ... ±180 V(Peak)	Accuracy	±0.02% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	1.5mV	
		Impedance	5.267 KΩ	
	No			
Recording	Sampling Rate		12.5 μs	
Protection	Detection		Over voltage	
	Setting		Soware Controlled: Time , Enable	
	Type		Test o, Change to Dry	
Galvanic Isolation		4 Group (1+1+1+1)		
LED		Green (1 Color)		

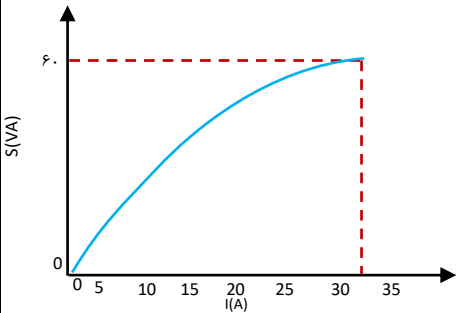(continue) Low Voltage, High Current Generators AMT203				
Phase	Range		0° to 360°	
	Resolution		1μ°	
	Accuracy		Guar.: 0.1° Typ.: 0.01°	
Frequency	Range		0 ... 2.5 kHz	
	Resolution		1 μHz	
	Accuracy		Guar.: 10 μHz Typ.: 1 μHz	
Recording	Sampling Rate		1.2 ms	
	Variable		Currents & Voltages	
Protection	Detection	Maximum Neutral Current	32A: Unlimited	
			64 A: 3 s	
	100 A: 300 ms			
	Setting		Soware Controlled: Time , Enable	
Type		Test off		
Maximum Neutral Current	4 mm (0.16 in) banana sockets / 32 A continuously			
Connection Banana Sockets	Group A (30 A continuously max)			
LED	RGB (16 Million Color)			
Harmonic Injection	Enter Harmonic	Yes	2 Free Harmonic	
	Harmonic Order	Yes	Maximum Order 40 for 50Hz (2KHz)	
Power				
Binary/Analog Inputs 203				
Number	4			
Dry	Open Circuit Voltage		ΔV	
	Short Circuit Voltage		Soware controlled	
Wet	Range 1: 0 ... ±4.5 V(Peak)	Accuracy	±0.02% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	1μV	
		Impedance	193.75 KΩ	
	Range 1: 0 ... ±30 V(Peak)	Accuracy	±0.02% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	250μV	
		Impedance	14.783 KΩ	
	Range 1: 0 ... ±180 V(Peak)	Accuracy	±0.02% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	1.5mV	
		Impedance	5.267 KΩ	
	Range 1: 0 ... ±520 V(Peak)	Accuracy	±0.02% of rg.	
		Accuracy (Avg)	±0.02% of rg.	
		Resolution	4mV	
		Impedance	4.298 KΩ	
Recording	Sampling Rate		12.5 μs	
Protection	Detection		Over voltage	
	Setting		Soware Controlled: Time , Enable	
	Type		Test o, Change to Dry	
Galvanic Isolation		4 Group (1+1+1+1)		
LED		RGB (16 Million Color)		

Relay Tester AMT



Binary Outputs AMT103			
Type	Electro mechanical relay contacts		
	-		
Control	Soware controlled		
Number	4		
Maximum Voltage in open mode	Electro Mechanic	VΔ•V (Rms)	
	No		
Maximum Current	Electro Mechanic	I•A (Rms)	
	No		
Break Capacity AC	Electro Mechanic	YΔ••VA	
	No		
Break Capacity DC	Electro Mechanic	Y•••W	
	No		
Recording	No		
Protection	No		
Galvanic Isolation	FGroup (1+1+1+1)		
LED	Green (1 Color)		
AC/DC Current Measuring Input AMT103			
Range 2: 0 ... ± 800 mA	Accuracy	•.05% of rg	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	ϵμA	
	Shunt	1Ω	
Range 3: 0 ... ± 35 mA	No		
Range 1: 0 ... ± 10 A	No		
Range 4: 0 ... ± 250 μA	No		
Recording	Resolution	F••μs	
Protection	Accuracy	Overcurrent	
	Setting	Soware Controlled: Time , Enable	
	Type	Test o, Change to open circuit	
Galvanic Isolation	1 Group		
LED	Green (1 Color)		
AC/DC Voltage Measuring Input AMT103			
Range 1: 0 ... ±400 mV(Peak)	Accuracy	•.05% of rg.	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	YμV	
	Impedance	ΔF.7826 KΩ	
Range 2: 0 ... ±120 mV(Peak)	No		
Range 1: 0 ... ±50 mV(Peak)	No		
Range 2: 0 ... ±10 mV(Peak)	No		
Recording	Sampling Rate	F•• μs	
Protection	Detection	Over Voltage	
	Setting	Software Controlled: Time , Enable	
	Type	Test o	
Galvanic Isolation	1 Group		
LED	Green (1 Color)		
AUX. DC AMT103			
Aux. DC	No		
GPS AMT103			
Internal GPS Module	Yes		
Accuracy	Ans		
Time To Lock	1•s		
Delay Adjustment	Yes		

Binary Outputs AMT203			
Type	Electro mechanical relay contacts		
	Transistor		
Control	Soware controlled		
Number	4		
Maximum Voltage in open mode	Electro Mechanic	VΔ•V (Rms)	
	Transistor	Δ•V	
Maximum Current	Electro Mechanic	I•A (Rms)	
	Transistor	Δ•mA	
Break Capacity AC	Electro Mechanic	Smax	YΔ••VA
	Transistor	Smax	Y.5 VA
Break Capacity DC	Electro Mechanic	Pmax	Y•••W
	Transistor	Pmax	Y.5W
Recording	Sampling Rate	Δ• μs	
	Resolution	YmA	
	Accuracy	•.3 mA	
Protection	Detection	Overcurrent	
	Setting	Soware Controlled: Time , Enable	
	Type	Test o, Open Relays	
Galvanic Isolation	FGroup (1+1+1+1)		
LED	RGB (16 Million Color)		
AC/DC Current Measuring Input AMTY03			
Range 2: 0 ... ± 800 mA	Accuracy	•.05% of rg	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	ϵμA	
	Shunt	1Ω	
Range 3: 0 ... ± 35 mA	Accuracy	•.05% of rg	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	•.3 μA	
	Shunt	YΩ	
Range 1: 0 ... ± 10 A	Accuracy	•.05% of rg	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	1.5mA	
	Shunt	ΔmΩ	
Range 4: 0 ... ± 82 μA	Accuracy	•.05% of rg	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	ϵnA	
	Shunt	YKΩ	
Recording	Resolution	1Y.5 μs	
Protection	Accuracy	Overcurrent	
	Setting	Soware Controlled: Time , Enable	
	Type	Test o, Change to open circuit	
Galvanic Isolation	1 Group		
LED	RGB (16 Million Color)		
AC/DC Voltage Measuring Input AMT203			
Range 1: 0 ... ±400 mV(Peak)	Accuracy	•.05% of rg.	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	YμV	
	Impedance	ΔF.7826 KΩ	
Range 2: 0 ... ±120 mV(Peak)	Accuracy	•.05% of rg.	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	1μV	
	Impedance	1Y•Y/VΔ KΩ	
Range 1: 0 ... ±50 mV(Peak)	Accuracy	•.05% of rg.	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	Δ•••nV	
	Impedance	ΔF.7826 KΩ	
Range 2: 0 ... ±10 mV(Peak)	Accuracy	•.05% of rg.	
	Accuracy (Avg)	•.02% of rg.	
	Resolution	1•••nV	
	Impedance	1Y•Y/VΔ KΩ	
Recording	Sampling Rate	1Y/Δ μs	
Protection	Detection	Over Voltage	
	Setting	Software Controlled: Time , Enable	
	Type	Test o, Change to open circuit	
Galvanic Isolation	1 Group		
LED	RGB (16 Million Color)		
AUX. DC AMT203			
Aux. DC	Any combination of 4 channels	Max Voltage : 1200 V , 0.4 A	
		Max Current : 8 V , 210 A	
GPS AMT203			
Internal GPS Module	Yes		
Accuracy	Ans		
Time To Lock	1•s		
Delay Adjustment	Yes		

Relay Tester AMT



Protocol AMT103		
IEC 61850	GOOSE Publish	10
	Goose Subscribe	10
	Virtual Binary I/O	32 IN / 32 OUT
	SV Publish Streams	NO
	SV Subscribe Streams	NO
	SV Sample Rates	NO
	Ethernet Ports	1x RJ45 100Base
	Time Sync	PPS
	Time Accuracy	±80 ns (PPS)
Combination Cable AMT103		
V ^o Voltage, 3 Current		Yes
F ^o Current		Yes
PC Connection AMT103		
Wifi		Yes
LED		1 Port
Programming USB Port		No
Physical Characteristic AMT103		
Weight		1Fkg
Dimension		Y ^o Δcm-35cm-15cm
Operating Temperature		-10 to 55° C
Storage Temperature		-20 to 85° C
Humidity		Y ^o %
Transformer Specification AMT103		
HV & LV outputs-power	Frequency	
	Power	
HV & LV outputs-Voltage	Y ^o -phase AC (RMS)	±-150 V(LN)....550mA peak
	I ^o -phase AC (RMS)	±-450V(LN)....550 mA peak
	Y ^o -phase DC	±-220V(LN)....550 mA
	I ^o -phase DC	±-630V(LN)....550mA peak
HV & LV outputs-Current	Y ^o -phase AC (RMS)	±-32A....12V
	I ^o -phase AC (RMS)	
	Y ^o -phase DC	±-10A....12V
	I ^o -phase DC	±-10A....40V
HV & LV input-Voltage	AC(RMS)	... 400m V 0.01 % rd + 0.017 % range ... 4.5 V 0.007 % rd + 0.012 % range ... 30V 0.022 % rd + 0.032 % range ... 188V 0.01 % rd + 0.017 % range
	DC	
HV & LV input-Current	AC(RMS)	... 800 mA 0.008 % rd + 0.01 % range
	DC	
Test Standard		IEC61869 / 60044
Voltage Output Range		±-450V
Current Output Range		±-128A
Output Frequency Range		DC & 5-2500HZ
CT Ratio Measurement Accuracy		Ratio: 1-30000 accuracy: 0.2
Phase displacement: Resolution Accuracy		0.01 min Y ^o min (typical) / 5 min (guaranteed)
Minimum Knee Point		±.5V
Maximum Knee Point		FΔ±.V
Winding Resistance Resolution Accuracy		1 mΩ ±.05 % (typical) / 0.1 % + 1 mΩ (guaranteed)
Current Input Range(CT Secondary Side)		1mA - 500mA
Minimum Knee Current		1mA
Maximum Knee Voltage		1.5A Up to 4KV

Protocol AMT203		
IEC 61850	GOOSE Publish	128
	Goose Subscribe	128
	Virtual Binary I/O	360 IN / 360 OUT
	SV Publish Streams	10
	SV Subscribe Streams	10
	SV Sample Rates	80-256 samples/cycle
	Ethernet Ports	3x RJ45 100Base, 1x External Fiber 100Base (Optional)
	Time Sync	PTP (IEEE-1588), IRIG-B, PPS, SNTP
	Time Accuracy	±1 μs (PTP), ±80 ns (PPS)
Combination Cable AMT203		
V ^o Voltage, 3 Current		Yes
F ^o Current		No
PC Connection AMT203		
Wifi		Yes
LED		1 Port
Programming USB Port		Yes
Physical Characteristic AMT203		
Weight		1Fkg
Dimension		Y ^o Δcm-35cm-15cm
Operating Temperature		-10 to 55° C
Storage Temperature		-20 to 85° C
Humidity		Y ^o %
Transformer Specification AMT203		
HV & LV outputs-power	Frequency	
	Power	
HV & LV outputs-Voltage	Y ^o -phase AC (RMS)	±-600 V(LN)....1.2 A peak
	I ^o -phase AC (RMS)	±-1200V(LN)....1.2 A peak
	Y ^o -phase DC	±-850V(LN)....1.2 A
	I ^o -phase DC	±-1700V(LN)....1.2 A peak
HV & LV outputs-Current	Y ^o -phase AC (RMS)	±-32A....22V
	I ^o -phase AC (RMS)	
	Y ^o -phase DC	±-10A....22V
	I ^o -phase DC	±-10A....60V
HV & LV input-Voltage	AC(RMS)	0 ... 10 mV 0.022 % rd + 0.032 % range ... 50 mV 0.01 % rd + 0.017 % range ... 120m V 0.007 % rd + 0.012 % range ... 400m V 0.01 % rd + 0.017 % range ... 4.5 V 0.007 % rd + 0.012 % range ... 30V 0.022 % rd + 0.032 % range ... 188V 0.01 % rd + 0.017 % range ... 520 V 0.007 % rd + 0.012 % range
	DC	
HV & LV input-Current	AC(RMS)	0 ...82 uA 0.1 % rd + 0.023 % range ... 35 mA 0.037 % rd + 0.026 % range ... 800 mA 0.008 % rd + 0.01 % range ... 10 A 0.008 % rd + 0.01 % range
	DC	
Test Standard		IEC61869 / 60044
Voltage Output Range		±-1200V
Current Output Range		±-128A
Output Frequency Range		DC & 5-2500HZ
CT Ratio Measurement Accuracy		Ratio: 1-30000 accuracy: 0.2
Phase displacement: Resolution Accuracy		0.01 min Y ^o min (typical) / 5 min (guaranteed)
Minimum Knee Point		±.01V
Maximum Knee Point		1±KV
Winding Resistance Resolution Accuracy		1 mΩ ±.05 % (typical) / 0.1 % + 1 mΩ (guaranteed)
Current Input Range(CT Secondary Side)		1mA - 7 A
Minimum Knee Current		1±uA
Maximum Knee Voltage		10A up to 50V Y ^o .5A Up to 10KV

Relay Tester AMT



PT SPECIFICATION AMT103	
Test Standard	IEC61869 / 60044
Voltage Output Range	0-450V AC
Current Output Range	0-128A
Ratio Measurement Voltage Level Typical accuracy	Ratio: 1-500KV accuracy: 0.2
Phase displacement measurement Voltage level Typical accuracy	0.01 min 1°min (typical) / 5 min (guaranteed)
Winding Resistance: Resolution Guaranteed Accuracy Typical accuracy	1 mΩ 0.1 % + 1 mΩ 0.05 %

PT SPECIFICATION AMT203	
Test Standard	IEC61869 / 60044
Voltage Output Range	0-1200 V AC
Current Output Range	0-128A
Ratio Measurement Voltage Level Typical accuracy	Ratio: 1-500KV accuracy: 0.2
Phase displacement measurement Voltage level Typical accuracy	0.01 min 1°min (typical) / 5 min (guaranteed)
Winding Resistance: Resolution Guaranteed Accuracy Typical accuracy	1 mΩ 0.1 % + 1 mΩ 0.05 %

Relay Tester AMT



Introduction

Among the most fundamental needs of engineers in the field of protection and testing of electrical equipment are **precise current and voltage injection devices** as well as **high-accuracy measurement tools**. These instruments play a key role in performing tests and evaluating the performance of critical power-system equipment.

In addition, engineers and specialists involved in the **manufacturing, maintenance, and servicing** of industrial equipment and high-voltage substations require **reliable, accurate tools** to carry out tests in accordance with **international standards**. These tests include examinations of equipment such as **power transformers, circuit breakers, disconnectors, current transformers (CTs)** and **voltage transformers (VTs)** across various classes, as well as **reactors** and **capacitor banks**.

Drawing on the valuable experience and deep technical expertise of its team, **Vebko** has succeeded in designing and producing devices that integrate multiple capabilities into a **single, unified multi-purpose instrument**—significantly reducing the **size, weight, and number of devices** required, and yielding substantial **savings in procurement and maintenance costs** for industrial and laboratory environments.

Beyond improving **accuracy, repeatability, and test speed**, these solutions also enhance the **safety** and **efficiency** of the testing process. For this reason, Vebko's modern test systems are an effective and attractive replacement for **traditional, fragmented setups**.

Given the broad scope of applications for Vebko's test devices, a set of **accessories and auxiliary tools** is also available, including various **cables, interfaces, terminals, probes, and adapters**, enabling the required connections with the **highest levels of safety, accuracy, and electrical stability**.

These accessories are offered as **dedicated kits**, allowing specialists to choose the most appropriate configuration according to **test type, operating voltage**, and the **size** of the device under test. This **modular design** increases ease of execution and provides high **flexibility** in industrial and laboratory settings.



Relay Tester AMT



	Description	Code	QTY
	Test device with 4 voltage sources and 6 current sources. 8 binary/analog inputs. 2 AC/DC analog inputs. 4 binary outputs. LAN / Wi-Fi / Serial connectivity. Weight: 12.5 kg. Dimensions: 39 cm × 41 cm × 19 cm	AMT1003	1
	Test device with 6 voltage sources and 6 current sources. 8 binary/analog inputs. 2 AC/DC analog inputs. 4 binary outputs. LAN / Wi-Fi / Serial connectivity. 3 network ports. Convertible current and voltage sources. Weight: 12.5 kg. Dimensions: 39 cm × 41 cm × 19 cm	AMT2050	1
	Protective relay tester carry case for safe transport of the device	AMT1001	1
	Test clamp suitable for various power equipment, with 4 current pins and 1 voltage pin	AMT1016	8
	Protective cover for the test clamp	AMT1028	8
	8-core, 4-color, 3-meter cable for easier connection between the device and the relay, rated 300 V and 32 A per core	AMT1004	1
	RJ45 cable for connecting the device and the laptop	AMT1007	1
	Device power cable Length: 1.5 m 250 V, 10 A	AMT1006	1

Relay Tester AMT



	Alligator clips for connecting to pins or screws during equipment tests	AMT1012	4
	7-meter, 8-core cable suitable for equipment testing	AMT1015	3
	Soft carry bag for the device, with compartments for accessories	AMT1002	1
	Box containing 3 non-polar capacitors, 10,000 μ F and 60 V	AMT1019	1
	Flexible test lead with plastic insulation for safe use on test terminals	AMT1011	4
	USB Type-B to USB Type-A cable	AMT1026	1
	Flexible test lead with plastic insulation for safe use on test terminals	AMT1014	4
	Black cable ties	AMT1013	5
	3-meter, 4-core two-color cable suitable for relay and equipment testing	AMT1005	5
	RS-232 dongle and protective fuse for the device	AMT1020	1
	Flexible terminal adapters for screw terminals	AMT1009	12


Relay Tester AMT



	Terminal adapters for screw terminals	AMT1010	12
	Grounding cable suitable for the device	AMT1008	1
	Infrared optical sensor for meter testing	AMT1018	1
	GPS antenna for syncing multiple devices, length 15 m	AMT1017	1
	Backpack for carrying cables and test clamps	AMT1023	1
	Suitcase cover for the device to protect it during air and intercity transport	AMT1024	1
	Screwdriver for opening the device (if needed)	AMT1022	1
	Black pouch for small equipment and cables	AMT1025	1
	Cable retainer for bundled cables	AMT1021	16

Relay Tester AMT



	instrument Base Plate	C01-AMT1030	1
	Circuit breaker test module – CBA105	C12-AMT1031	1
	CT & CVT test module – CTA105	C13-AMT1033	1
	Transformer test module – TRA105	C11-AMT1032	1
	Electronic Relays Tester Module – RTA105	C30-AMT1047	1
	Auto Calibration – CLA105	C20-AMT1056	1
	BI shunt	C52-AMT1060	1





Relay Tester AMT



	Clamp Booster	C50-AMT1058	1
	Rogowski	C53-AMT1061	1
	Earthing Test Electrode	C60-AMT1063	
	Insulation Resistance Measuring	C40-AMT1051	1
	Arc-flash initiator	C51-AMT1059	1
	G6A Relay	C31-AMT1055	1


Relay Tester AMT



	P3C8	C36-AMT1045	1
	DP12	C32-AMT1041	1
	P3H34	C37-AMT1044	1
	DP12 Guide	C33-AMT2020	1
	GPS With 50 Meters Cable	C55-AMT1049	1

Relay Tester AMT



	Extended Binary	C56-AMT1065	1
	Sample Value	C70-AMT1066	1
	Recloser Test Cable	C54-AMT1064	1

Relay Tester AMT



Introduction



Vebko, with the goal of expanding its engineering services and technical support internationally, has established a broad network of 22 active representatives worldwide. This network is designed and developed to give customers easier access to sales, training, after-sales services, and specialized technical support. Vebko's official representatives operate across Asia, Europe, Africa, and South America, and—leveraging experienced, well-trained experts—maintain direct contact with the company's headquarters to ensure the highest levels of coordination, support, and service quality for customers. Building this international structure is a significant step toward realizing Vebko's vision of becoming a trusted, reputable brand in the field of power-system testing and measurement equipment. The company's extensive representative network not only simplifies communication with customers around the world, but also provides an effective platform for specialized training, consulting services, and local support—so that customers can benefit from Vebko's standardized, integrated services in the shortest possible time.

Turkey



Bailey Sam Vebko
Mr. Javad Yousefi
Mobile: 00905539121772
Email: baileysamturkey@gmail.com
Email: javadyousefi@gmail.com

Australia



Power Grid Solution Innocent Bisanabo
Direct contact information:
Mr. Innocent Bisanabo
Tel: +610431368849
Email: ib@powergridsolutions.com.au
Website: www.powergridsolutions.com.au
Linkedin: <https://www.linkedin.com/in/innocent-bisanabo-2b7a0b5/>
Address: BTP Hub, 3 Clunies Ross Court, Eight Mile Plains QLD 4113

Brazil



TDM PROTECTION & CONTROL
Direct contact information:
Mr. Waldery Souza
+55 11 98448-2693
waldery.souza@tdmservicos.com.br
<https://tdmservicos.com/>
<https://www.linkedin.com/company/tdmservicostecnicos>



England

EM Enterprise International Ltd
Direct contact information:
Mr. Edward Mowbray
Tel: +447985380309
Email: edward@emeitd.co.uk,
Emowbray.emei@outlook.com
Linkedin: <https://www.linkedin.com/in/edward-mowbray-engtech-miet-6994bb38/>,
<https://www.linkedin.com/in/vebko-uk-8b3766225/>
Address: 33 Bradford Road, Boston, Lincolnshire, PE21 8BJ

Indonesia



CV Kiat Energi
Direct contact information:
Mr. Rendi Ardian
Tel: +6281932906567
Email: rere.ardian@gmail.com
Linkedin Address: <https://www.linkedin.com/in/rendi-ardian-38b64b44/>
Address: Gd. Senatama Lt. 2 R209, Jl. Kwitang Raya No.8 RT001 / RW007, Kwitang – Senen, Jakarta Pusat 10420, Indonesia



Iraq

Power Team Company
Direct contact information:
Mr. Bilal Al-Obaidi
Tel: +964 783 570 7667
Email: info@ptc-iq.com
Website: www.ptc-iq.com
Address: Palestine Street, Baghdad, IRAQ

Relay Tester AMT



Morocco



GRID GENIUS
1 Bd LAGHOTA SIDI MOUMEN RESIDENCE
ALYASSAMINE N B110 Casablanca , Maroc
email: smail.oumellal@grid-genius.com
mobitel: + 212 6 61 48 68 75
Mr.Smail OUMELLAL (General Manager)

Nigeria



Mr. Adeodun Soji Tayo
Direct contact information:
Mr. Adeodun Soji Tayo
Tel: +2348039565491
Email: Soj3az@yahoo.com
Linkedin Address:
<https://www.linkedin.com/in/adeodun-soji-tayo-9260b25b/>
Address: Kuje FCT-Abuja, Nigeria

Philippines



EXE Engineering Services and Solutions.
Address : G/F Kaizen Building 4H Abellana
Extension, Basak, Mandaue City, Cebu
Philippines, 6014
Contact : Edgar Cabatingan
email: emc@exepowercorp.com
Tel.: +63 917 688 8630



South Africa

Tebnox
Direct contact information:
Mr. Teboho Galela
Tel: +27 61 266 3968
Email: galelatc@tebnox.co.za
Linkedin Address: <https://www.linkedin.com/in/teboho-galela-44080193/>
Address: 35 Rainbow Avenue, Farramere, Benoni,
1501, Gauteng, South Africa.

Thailand



EICA CO, Ltd
Direct contact information:
Mr. Thanis Sribovornmongkol
Mobile: +66 (0) 98 715-1488
Tel: +66 (0) 95 368-0844
Fax: +66 (0) 2 117-1458
Email: engineering@eica.co.th
Address: 55/3 Ram-Intra 34 Yeak 20 Tha-Raeng,
Bang Khen, Bangkok, THAILAND 10220



NS POWER TEST SOLUTIONS.
Direct contact information:
Mr. Nikunj Dave
Mobile: +91 96012 82133
Email: info@powertest.in ,
j.panchal@powertest.in
Website: www.powertest.in
Address: B-618, Shalin Square, Hathijan Circle,
Vinzol,
Ahmedabad, Gujarat, India- 382445.

Croatia



Geneko d.o.o
Direct contact information:
Mr. Josip Jaman
+385 99 479 4901
geneko.vu@gmail.com
ddrmic13@gmail.com
josipjaman@gmail.com
<https://https://geneko.hr/en/homepage/>



Bahrain

Bahrain Agency
Edsar Technical Services and Trading WLL
Mr. Sarun Nambradath
Tel: +97333199120
Email: info@edsartech.com
sarun.n@edsartech.com

Relay Tester AMT



Oman



Oman Agency
AL JISR UNITED INTERNATIONAL LLC.
Mr. Nikunj Dave
Tel: +971585587754
+96891015097
Email: info@aljisirunited.com

Uruguay



Oman Agency
AL JISR UNITED INTERNATIONAL LLC.
Mr. Nikunj Dave
Tel: +971585587754
+96891015097
Email: info@aljisirunited.com

Vietnam



Vietnam Agency
NHAT HA ELECTRIC
Mr. Quan Nguyen
Tel: +84906650110
Email: sale@nhatha-electric.com

Saudi Arabia



Communication and Power Systems Company Limited(CAPSCO)
Contact information:
Manager- Mr. MohammadAsif Thakor +966 54 620 2194
+971 58 558 7754
Director: Mr. Abdul kalam Azad +971 55 390 4711
Sales engineer: AFAQUE KAZI +966 54 273 2251
Email: info@capSCO.org
Address: P.O. Box- 1245, 25th Riyadh Street, Thouqba, Khobar- 31952, Kingdom of Saudi Arabia

U.A.E



Nikunj Dave +971 058 558 7754
POWERTEST
Power Testing Solutions
Business Centre, Sharjah Publishing City, Sharjah, United Arab Emirates.
info@powertestae
www.powertest.ae
Power Test Solutions
Mr. Nikunj Dave
Tel: +971-585587754
+91-9601282133
E-mail: info@powertest.ae



Pakistan

TQIUPMENT Accurate Measuring And Testing Equipment
TQIUPMENT Co Mr. Waqar
Tel: +92-3274961920 +92-3188700069
E-mail: sales.tqipment@gmail.com

Malaysia



WARNA RS SDN. BHD.
Direct contact information:
Mr. Jamil Ahmad Radziyan Tel: +60124823264
Email: jamil@warnars.com.my
Address: No. 5, Bgn. Perniagaan Taman
Desa Meranti Indah, Padang Temusu,
08000 Sungai Petani, Kedah, MALAYSIA



Armenia

ENAEENERGO LLC
Mr. Edwin Markarian
Tel: +374-33162164
+374-99072107
+98-9109014864
Email: Info@enaenergo.com
Edwinmarkarian8@gmail.com

Relay Tester AMT



Algeria



Areixer Algerie
Mr. Guendouz Abdelaziz
Tel: +213-549572988
+33-614535524
Email: aguendouz@arixet-dz.com